

anschluß
G1/4

400V 50Hz

NEW



Hydraulic Clamp Systems

HDHSZ-A

HBS-A

PDV-A

HBSF


Flexible Clamp Systems

EVK-A with HKZ

NEW


HDHSZ-A

- clamping force up to 400 kN available
- high functional safety due to separate activation of „extension“ and „rotation“ function
- rotation by compact rack and pinion drive
- operating pressure 250 bar

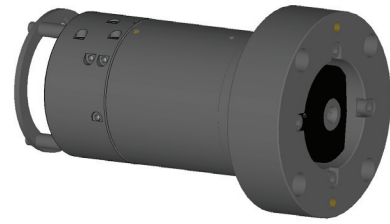


HBS-A

- low space requirement
- simple design thus very favourable price
- fixing hole pattern identical with PDV
- low operating pressure

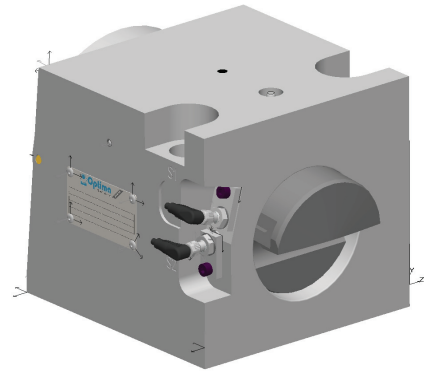


PDV-A

- simplified design thus very favourable price
- highest level of safety thanks to proven Optima toggle mechanism
- continuous clamping force monitoring
- switches protected by solid cover
- low operating pressure

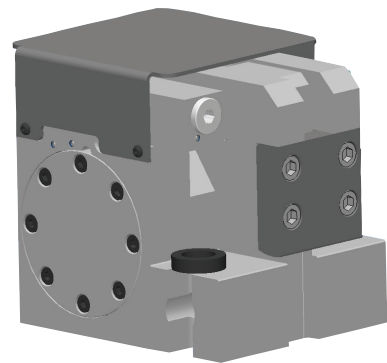

HBSF

- high mechanical load capacity
- in case of pressure fall holding force is maintained by internal spring
- fixing hole pattern identical with PDV
- low operating pressure
- simplified design thus very favourable price

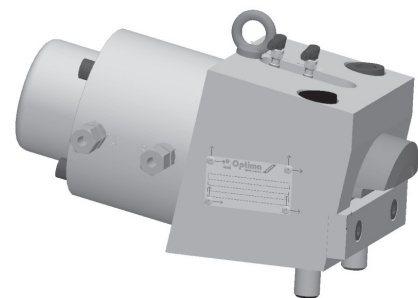

EVK-A with HKZ

- easy handling due to positioning chain
- operating pressure 240 bar
- displacement path up to 1000 mm available
- hydraulic hose placed safely inside the positioning chain
- simplified design thus very favourable price

